



JETWAVE®

HIGH PRESSURE CLEANERS

Distributed by:

RAPTOR™ 4200 psi • 15 l/pm



Petrol Driven



Cold Water



Frequent Usage

FIELDS OF APPLICATION

Schools and Universities
Agricultural Equipment
Car and Equipment Yards
Concrete and Landscaping
Household and Path Cleaning

The Jetwave® Raptor™ is loaded with game changing features that will revolutionise the pressure washing industry. Australian engineered and assembled using only the best quality Italian and global components.

NEW



HERO INNOVATIONS



Ergonomic

Telescopic soft grip handle for comfort and compactness.



Protection

Formed steel hi-viz cover to safeguard the heart of your investment and for work site safety.



Functional

Trolley configuration with tie down points.



Optimise

6 x anti-vibration protection for quieter performance.



Durable

Innovative anti-corrosion nylon bearings and puncture proof tyres.



Versatile

Singular centre balanced top lifting eyelet.

STANDOUT FEATURES



Professional Italian Triplex Interpump delivers performance and longer life.



Easy start HONDA™ GX390 Industrial Series OHV Engine.



Up to 6 x more abrasion resistant and anti-kink dual braid non-marking hose.



Dual M22 screw hose coupling system.



Brass DIY washable / viewable inlet water filter.



Jetwave Safety System™ (JSS) thermal valve to prevent overheating in excessive bypass and over pressurisation.



0-30° variable spray patterns hi-lo (soap) nozzle.



Integrated accessory storage for hose, gun and lance.



Optional easy key start with intelligent features and built in hour meter.

Registered Design No.: 201710299



Jetwave Group


72-74 Richmond Road
Keswick | Adelaide
South Australia | 5035 | AU

+61 8 8371 3599

sales@jetwave.com.au

jetwave.com.au

STANDARD EQUIPMENT

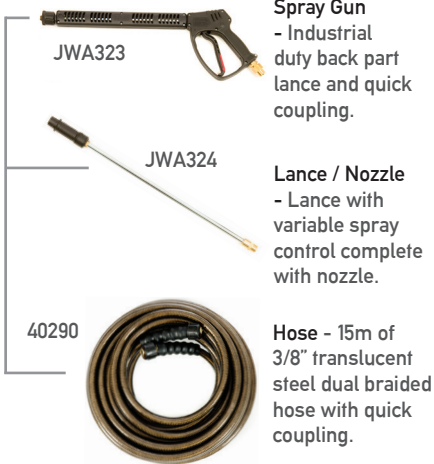

Spray Gun
- Industrial duty back part lance and quick coupling.

Lance / Nozzle
- Lance with variable spray control complete with nozzle.

Hose - 15m of 3/8" translucent steel dual braided hose with quick coupling.

OPTIONAL ACCESSORIES

1. Complete Turbo Head with Lance	p/n	JWA167
2. 15m Extension High Pressure Hose	p/n	40290
3. High Pressure Swivel	p/n	26105000
4. LS3-1 Foaming Lance with Tank	p/n	JWA221
5. High Pressure Hose Reel (cap 30m or 60m)	p/n	1060CMPL / 1065CMPL
6. Hammerhead™ Whirlaway 20" ABS	p/n	DCFSCP20
7. Hammerhead™ Whirlaway 22" Stainless Steel	p/n	DCFSCS22Z
8. Giraffe™ Telescopic Lance	p/n	DCLTG24A4
9. Sandblasting Kit	p/n	JWA164
10. Sludge Kit	p/n	80005
11. Drain Kit	p/n	HOP3X20
12. Four (4) Wheel Push Cart Kit	p/n	TBA
13. Flat Bed Mounting Kit	p/n	TBA
14. Forklift Pockets Kit	p/n	TBA
15. 5L Detergent Bottle Cradle Kit	p/n	TBA

Safety - High visibility neon yellow cover for safety and protection.

Ergonomics - Innovative trolley frame designed for durability.

Transportation - Tie down points to secure load.

Versatility - Telescopic handle and industrial accessories.

Power - HONDA™ GX390cc OHV engine.

Portability - Premium oversized puncture proof wheels.



Registered Design No.: 201710299

Product Code	p/n	CW4200-15P
--------------	-----	------------

TECHNICAL DATA

Working Pressure	psi / bar	4200 / 280
Flow Rate	l/pm	15
Max Water Inlet Temp	°c / °f	60 / 140
Class	grade	A (AS/NZS 4233.1:2013)

INTENDED APPLICATION

Usage Frequency	hours / type	2 - 4 daily / Intermittent
Category of Dirt / Debris	type	Medium

MOTOR FEATURES

Engine	type	HONDA™ GX390 (4 stroke, air cooled)
Power	hp / cc	13 / 390
Fuel Supply	type	Unleaded
Fuel Capacity	litres	6.1
Low Oil Shutdown	y / n	Y
Hour Meter	y / n	N
Starting System	type	Recoil / Pull

HYDRAULIC FEATURES

Pump / Head / Pistons	type	Interpump Plunger Triplex / Brass / Ceramic
Motor Pump Coupling	type	Direct Drive
Pump Speed	rpm	3400
Unloader Valve	type	Integral
Safety Valve	y / n	Y
Orifice / Nozzle	size	04

OTHER FEATURES

Electric / Key Start Available	y / n	Y (CW4000-15PE)
Adjustable Pressure	y / n	Y
Hose Reel Provision	y / n	Y
Frame Structure	type	Modular 2-wheel trolley with heavy gauge zinc steel and steel powder coated cover
Onboard Accessory Storage	y / n	Y
Detergent Injector	y / n	Y - Downstream low pressure

DIMENSIONS & WEIGHT

Approx Weight	kg	76 unit / 82 boxed
Unit Dimensions	mm	700(L) x 600(W) x 920(H)
Boxed Dimensions	mm	825(L) x 670(W) x 760(H)
Number per Pallet	type: pieces	AS: 4 or 8 / Euro: 2 or 4

WARRANTY(S)

Motor Warranty	years	4	
Limited Pump Warranty	years	2	
Limited Frame Warranty	years	5	
Limited Accessory Warranty	days	90	

POWERED by HONDA™

The manufacturer reserves the right to modify design features and technical facts without notice, due to our principals of continuous improvement.

V1.0 11/2017

*Coverage against defects in material and workmanship (refer to Jetwave's and component partners T&Cs).