

HORNET™ G2



3000 - 4060
PSI

15 - 21
L/PM

HONDA GX390
PETROL
ENGINE TYPE
POWERED by HONDA.

GEARBOX
1450RPM
DRIVE

COLD WATER
OUTPUT

HERO INNOVATIONS



PEXO™
Stainless Steel Exoskeleton



JWPP™
Jetwave Italian Premium Pump



CC™
Centralised Control



AVPS™
Anti Vibration Protection System



MC™
Multi COnfiguration



APPLICATIONS



Tradesmen



Commercial Cleaners



Agriculturist



Hire & Rental



STANDOUT FEATURES



JW® Enhanced Italian triplex plunger pump running at 1450RPM delivers more performance and longer life.



Industrial Honda™ GX390 pull start series engine that delivers performance and reliability.



Jetwave Safety System™ (JSS) thermal and safety valve to prevent overheating in excessive bypass and over pressurisation.



Zero line pressure brass adjustable unloader valve.



Anti flat all terrain wheels for reliable portability on site.



Emergency stop.

STANDARD EQUIPMENT





J5000™ High Pressure Gun + Twin Lance with Nozzles.



15m Double Wire Braid Hose with M22 Couplings.

DIMENSIONS (MM)

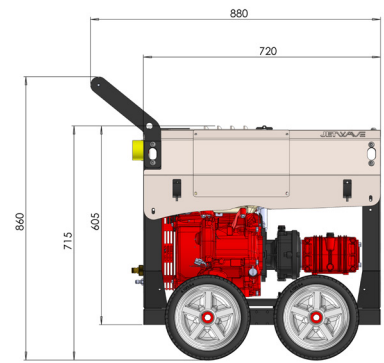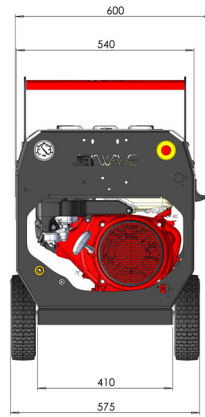

TECHNICAL DATA

HORNET™ G2 280

HORNET™ G2 200

| | | |
|----------------------|---|--------------------------|
| Product Code | CW4000-15PG2 | CW3000-21PG2 |
| Pressure / Flow Rate | 4060PSI (280 BAR) / 15 L/PM | 3000 (200 BAR) / 21 L/PM |
| Max Water Inlet Temp | 60°C | |
| Class (ASNZS: 4223) | A (4,200 Bar/Litres) | |
| Usage Frequency | Professional - 4 Hours Daily | |
| Nozzle Size | O4 | O6 |
| Frame Structure | CNC Modular skid galvanised steel chassis plus satin powder coat finish and stainless steel cover | |

MOTOR FEATURES

| | |
|-----------------------------------|---|
| Engine / Power | Honda™ GX390 Pull Start (air cooled) 13HP / 390cc |
| Fuel Type / Capacity / Protection | Unleaded / 6.1L / Low Oil Shutdown |



HYDRAULIC FEATURES

| | |
|--------------------------------|---|
| Pump / Head / Pistons | JW® Italian Triplex Plunger / Brass (Nickle Plated) / Ceramic |
| Motor Pump Coupling / Pump RPM | Gearbox Drive / 1450RPM |
| Unloader Valve | Independent (Zero) - Adjustable |
| Safety Valve | Yes |
| Detergent Injector | Yes - Downstream low pressure (power boost) |

DIMENSIONS & WEIGHT

| | |
|-----------------------------|---------------------------------------|
| Machine Dimensions / Weight | 880mm(L) x 575mm(W) x 860mm(H) / 86KG |
|-----------------------------|---------------------------------------|

WARRANTY(S)

| | |
|-----------------------|---|
| Unit / Pump Warranty* |  2 Years |
| Engine Warranty* |  3 Years |

OPTIONAL ACCESSORIES

| | |
|----------------------------------|-------------|
| 30m Hose Reel | 1060CMPL |
| 60m Hose Reel | 1067CMPL |
| Additional High Pressure Hose | 52001 |
| JW12 Foaming Lance w/1L Tank | JWA221-LS12 |
| JW Bypass Pro Foam | PROFOAM |
| Turbo Head w/Lance (300BAR) | JWA160 |
| 21" Hammerhead - Plastic | JWA-FSC21 |
| 21" Hammerhead - Stainless Steel | JWA-FSC21-5 |

OPTIONAL UPGRADES

| | |
|------------------------------------|-----------------|
| On-board Water Bypass Cooling Tank | 90008-12ROTCMPL |
| Low Level Water Cut Out | JWA218 |
| Top Lift Eyelets Kit | JWA551 |
| Wheel Brake System Kit | JWA-WBS |
| Engine Hour Meter | TOL8075 |

The manufacturer reserves the right to modify design features and technical facts without notice, due to our principals of continuous improvement.

*Coverage against defects in material and workmanship (refer to Jetwave's and component partners T&Cs).

V2.2 08/21