HORNET G2JNR









HONDA GX200

HONDA















APPLICATIONS



Tradesmen



Commercial Cleaners



Agriculturist



Construction





STANDOUT FEATURES



JW® UDOR® Italian plunger pump running at 1450RPM, delivers more performance and longer life.



Industrial Honda™ GX200 Series Engine that delivers performance and reliability.



Jetwave Safety System™ (JSS) thermal and safety valve to prevent overheating in excessive bypass and over pressurisation.



Zero line pressure unloader valve, with stainless steel pressure gauge.



Anti flat all terrain wheels for reliable portability on site.




Emergency stop for increased operator safety.









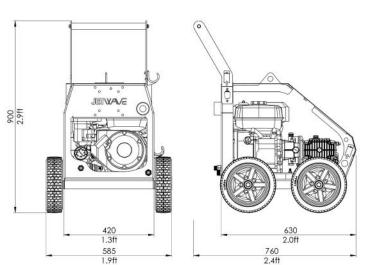

DIMENSIONS (MM)

HORNEL G2 JNR TECHNICAL DATA 0:00 CW3000-11PG2 **Product Code** Pressure / Flow Rate 3000PSI (200 BAR) / 11 L/PM (660 L/PH) / 2.9 GPM Max Water Inlet Temp 60°C / 140°F Class (AS/NZS: 4223) A (2,200 Bar/Litres) Professional: Daily Usage Frequency Nozzle Size 03 Frame Structure CNC Modular skid galvanised steel chassis plus satin powder coat finish and stainless steel cover

MOTOR FEATURES 🗂

Engine / Power Honda™ GX200 Pull Start (air cooled) 6.5HP / 200cc

Fuel Type / Capacity / Protection Unleaded / 3.1L / Low Oil Shutdown

TIT **HYDRAULIC FEATURES**

Pump / Head / Pistons JW® Italian Triplex Plunger / Brass / Ceramic

Motor Pump Coupling / Pump RPM Gearbox Drive / 1450RPM

Unloader Valve Independent (Zero) (Panel Mounted)

Safety Valve Yes

DIMENSIONS & WEIGHT

Machine Dimensions / Weight 760mm(L) x 585mm(W) x 900mm(H) / 65KG (approx.)

WARRANTY(S) 🕢

Unit / Pump Warranty* 2 Years Engine Warranty* 3 Years

OPTIONAL ACCESSORIES

30m Hose Reel w/30m hose 1060CMPL-HORJNR30M

JW Pro Turbo Head JWA303-03 12" FSC - ABS Plastic JWA-FSC12

The manufacturer reserves the right to modify design features and technical facts without notice; due to our principals of continuous improvement.

