



# JETWAVE®

## HIGH PRESSURE CLEANERS

Distributed by:

# SENATOR™ G2FI 4350 psi • 31 l/pm



Petrol Driven



Cold Water



Daily Usage

### FIELDS OF APPLICATION


- Roof Cleaning
- Painting Contractors
- Cleaning Contractors
- Boat Yards and Ports
- Agricultural Equipment
- Councils & Government

# NEW

The Jetwave® Senator™ G2FI heavy duty professional cold water petrol powered is by the new HONDA™ iGX800 fuel injected engine. Australian engineered and assembled using only the best quality Italian and global components; it offers world first Stainless Steel Exoskeleton (PEXO™) to maximise efficiency safety and minimise downtime.



JETWAVE  
POWERED by  
HONDA

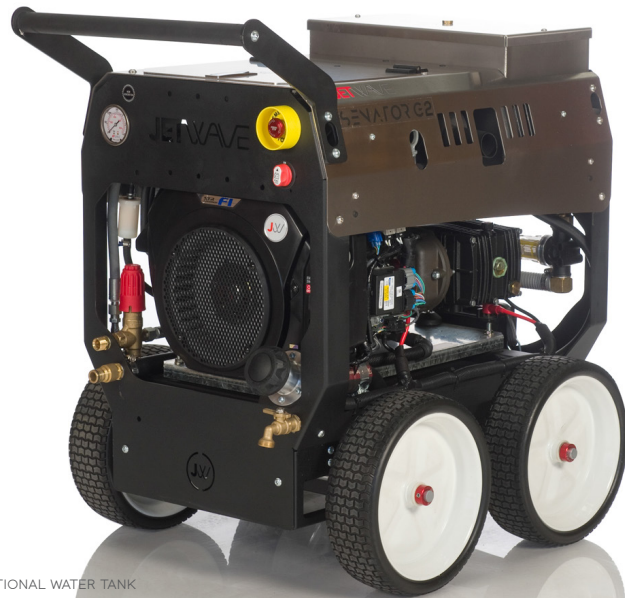

\*SHOWN WITH OPTIONAL WATER TANK

### HERO INNOVATIONS



**Stainless Steel Exoskeleton (PEXO™)**  
Formed stainless steel cover to safeguard components and for work site safety.



**Smart**  
Industry first customisable modular build with precision CNC heavy gauge, galvanised steel chassis. Build it your way.



**Functional**  
Easily accessible one panel front facia mounted control(s).



**Optimise**  
Anti-vibration protection system (AVPS™) for quieter performance.



**Convenient**  
Tie down points for easy transportation.



**Versatile**  
Multiple hose reel configurations.

### STANDOUT FEATURES



JW professional Italian triplex plunger pump delivers performance and longer life.



Low speed professional pump for increased reliability and longer maintenance intervals.



V-TWIN HONDA™ iGX 800 Industrial Series Smart EFI engine with digital hour meter.



Dual screw hose quick coupling system.



Heavy duty viewable washable inlet water filter.



Battery Isolator



Jetwave Safety System™ (JSS) thermal & safety valve to prevent overheating in excessive bypass and over pressurisation.



Integrated accessory storage for gun and lance.



Professional line accessories.



Stainless steel pressure gauge.



Brass adjustable unloader valve.



Emergency Stop



Forklift Pockets




Jetwave Group

10-16 Smith Street Thebarton I  
Adelaide I South Australia I 5031 I AU

+61 8 8371 3599


sales@jetwave.com.au

jetwave.com.au

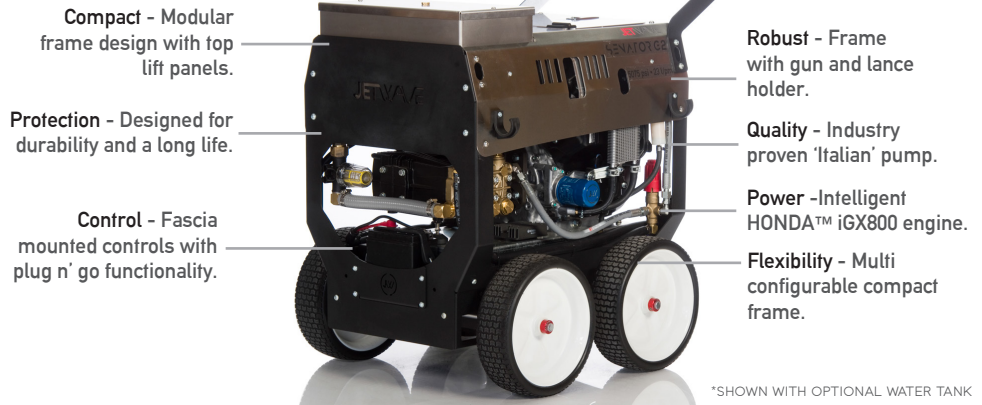

\*SHOWN WITH OPTIONAL WATER TANK

## STANDARD EQUIPMENT

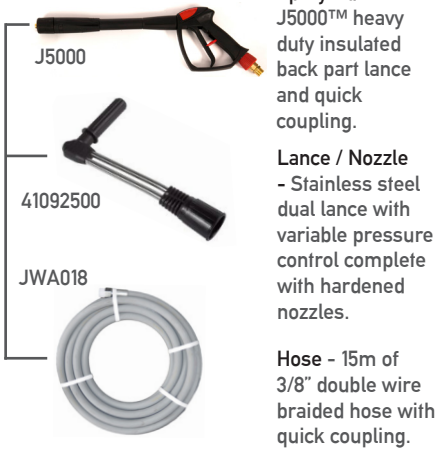

**Spray Gun - J5000™** heavy duty insulated back part lance and quick coupling.

**Lance / Nozzle - 4109250** Stainless steel dual lance with variable pressure control complete with hardened nozzles.

**Hose - 15m of 3/8" double wire braided hose with quick coupling.**

## OPTIONAL ACCESSORIES

Accessories	p/n	
High Pressure Swivel	p/n	26106100
Additional High Pressure Hose (per metre)	p/n	52001
Complete Turbo Head with Lance	p/n	JWA159
JW Pro Foam System	p/n	PROFOAM
OEM Hose Reel (30m Capacity)	p/n	1060CMPL
Pro Rapid Style Hose Reel (60m Capacity)	p/n	1067CMPL
Pro Rapid Stainless Steel Hose Reel (60m Capacity)	p/n	1067CMPLSS
Hammerhead™ FSC 21" Stainless Steel	p/n	JWA-FSC22
Hammerhead™ FSC 30" Stainless Steel	p/n	JWA-FSC30
Sandblasting Kit	p/n	JWA200
Sludge Kit	p/n	80005
Drain Cleaning Hose	p/n	HOP2X15VF
Professional Drain Cleaning Kit	p/n	JWA-PDCK
Vulcan V2 Hot Box	p/n	10199

## OPTIONAL MACHINE UPGRADES

Upgrades	p/n	
Digital Engine Hour Meter, Emergency Stop, Battery Isolator, Forklift Pockets, 4 Wheel Trolley Kit	p/n	Included
Stainless Steel Bypass Tank	p/n	90008-31SCMPL
Low level Water Cut Out	p/n	JWA220
Flat Bed Mounting Kit	p/n	JWA406
Double Stacked Top Hose Reel Plate Kit	p/n	JWA430-B
Double Stacked Front Hose Reel Plate Kit	p/n	JWA429-B
Van Mount Drip Tray	p/n	JWA432

The manufacturer reserves the right to modify design features and technical facts without notice, due to our principals of continuous improvement.

Product Code	p/n	CW4350-31PEFIG2
<b>TECHNICAL DATA</b>		
Working Pressure	psi / bar	4350 / 300
Flow Rate	l/pm	31
Max Water Inlet Temp	°c	60
<b>INTENDED APPLICATION</b>		
Usage Frequency	hours / type	4 - 6 / Daily
Category of Dirt / Debris	type	Heavy
Class (AS/NZS: 4233)	grade	B (9,300 BAR/LITRES)
<b>MOTOR FEATURES</b>		
Engine	type	HONDA™ iGX800 (4 stroke, air cooled)
Power	hp / cc	25 / 800
Fuel System	type	EFI
Fuel Supply	type	Unleaded
Fuel Capacity	litres	27
Low Oil Shutdown	y / n	Y
Hour Meter	y / n	Y
Starting System	type	Electric Key start
<b>HYDRAULIC FEATURES</b>		
Pump / Head / Pistons	type	JW® Italian Triplex Plunger / Brass (nickel plated / Ceramic)
Motor Pump Coupling	type	Gearbox Drive
Pump Speed	rpm	1650
Unloader Valve	type	Independent
Safety Valve	y / n	Y
Orifice / Nozzle	size	065
<b>OTHER FEATURES</b>		
Adjustable Pressure	y / n	Y
Hose Reel Provision	y / n	Y (3 positions)
Frame Structure	type	CNC Modular skid with heavy gauge galvanned steel chassis and stainless steel cover
Onboard Accessory Storage	y / n	Y
Detergent Injector	y / n	N
<b>DIMENSIONS &amp; WEIGHT</b>		
Approx Weight	kg	200 unit / 210 boxed
Unit Dimensions	mm	1110(L) x 700(W) x 860(H)
Boxed Dimensions	mm	970(L) x 600(W) x 670(H)
Number per Pallet	type: pieces	AS: 2 / Euro: 1
<b>WARRANTY(S)</b>		
Engine Warranty*	year(s)	3
Pump Warranty*	year(s)	3

\*Coverage against defects in material and workmanship (refer to Jetwave's and component partners T&Cs).